

# Air release valve Mod. EOLO

The CSA automatic air valve Eolo will ensure the proper operation of the system allowing the release of air pockets accumulating during working conditions.



# **Technical features and benefits**

- Upper and lower bodies in ductile cast iron PN 25 rated.
- Float in stainless steel AISI 304 covered with vulcanized NBR or EPDM.
- Air release system in stainless steel AISI 303 or 316.
- Nuts and bolts in stainless steel AISI 304 or 316.
- Simple and compact.

# **Applications**


- Water distribution systems.
- Irrigation, cooling systems.
- Buildings.
- In general where the air release function is necessary.

# Note to the engineer

■ The air valve is supplied with 1" threaded female connection, on request provided with ball valve and flange.



### **Technical details**

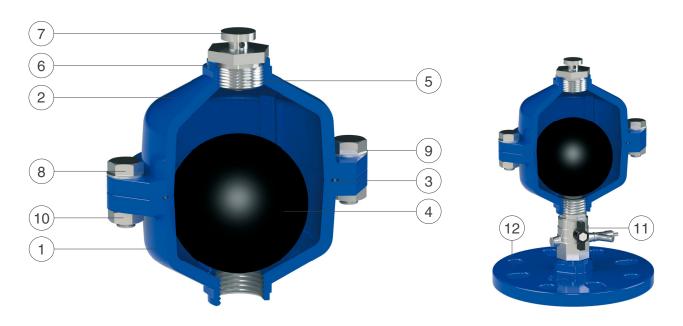

N.	Component	Standard material	Optional
1	Lower body	ductile cast iron GJS 450-10	
2	Upper body	ductile cast iron GJS 450-10	
3	O-ring	NBR	EPDM/Viton/silicone
4	Float	NBR/EPDM coated stainless steel AISI 304	
5	Nozzle	stainless steel AISI 303	stainless steel AISI 316
6	O-ring	NBR	EPDM/Viton/silicone
7	Nozzle tap	stainless steel AISI 303	stainless steel AISI 316
8	Screws	stainless steel AISI 304	stainless steel AISI 316
9	Washers	stainless steel AISI 304	stainless steel AISI 316
10	Nuts	stainless steel AISI 304	stainless steel AISI 316
11	Ball valve (on request)	nickel-plated brass	stainless steel AISI 316
12	Flange (on request)	ductile cast iron GJS 450-10	painted steel/AISI304/316

The list of materials and components is subject to changes without notice.

# **Working conditions**

Treated water max. 60°C. Higher temperatures on request. Max. pressure 25 bar. Min. pressure 0,1 bar.

# **Standard**


Designed in compliance with EN-1074/4.

Standard connection 1" BSP, flanged on request. Flanges according to EN 1092/2.

Epoxy painting applied through fluidized bed technology blue RAL 5005.

Changes and variations on the flanges and painting details available on request.

# Air flow performance chart



### AIR RELEASE DURING WORKING CONDITIONS

The air flow charts were created in Kg/s from laboratory tests and numerical analysis, then converted in Nl/s using a safety factor.

