



Wastewater combination air valve Mod. SCF

SCF air valve guarantees the proper operation of sewage lines allowing the entrance and the discharge of large volumes of air, during pipe draining and filling operations, and the release of air pockets during working conditions.



Technical features and benefits

- Large lower body designed with strongly sloped funnel shaped walls to avoid deposit of grease or other material, and containing four ribs obtained by casting to guide the stainless steel float.
- Upper body containing a casing that protects the air release device against spurts during rapid filling.
- Mobile block including a large AISI 316 stainless steel float, placed on the lower body, and connected through a stainless steel rod to the air release system.
- Flat obturator in solid polypropylene to avoid deformations and to prevent it from remaining stuck to the gaskets, while other materials have the tendency to do it.
- Drainage valve for chamber control and draining.
- Nozzle and gasket holder (patent pending) wear resistant thanks to gasket compression control.
- Maintenance can be easily performed from the top without removing the air valve from the pipe.
- Evacuation bend in polypropylene standard for DN 50/65 and on request for other DN (through SUB kit).

Applications


- Sewage main transmission lines.
- Treatment plants.
- Irrigation systems in presence of solids/debris in suspension.
- Whenever the technology of air valves for treated water can't be used for the risk of clogging and damages to the internal components.

Operating principle



Discharge of large volumes of air

During the pipe filling it is necessary to discharge air as liquid flows in. The SCF, thanks to an aerodynamic body and deflector, will make sure to avoid premature closures of the mobile block during this phase.

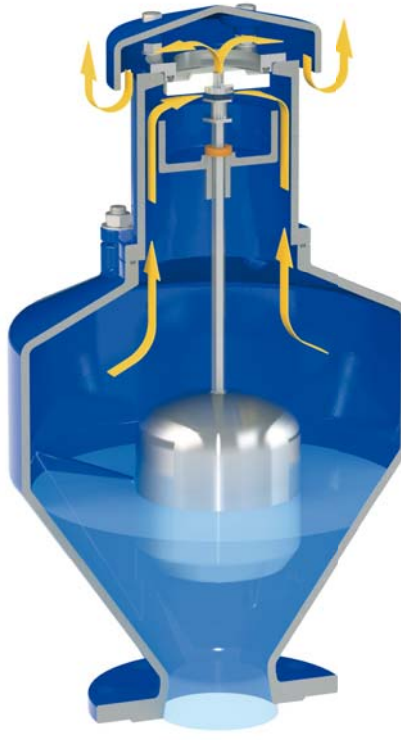

Air release during working conditions

During operation the air produced by the pipeline is accumulated in the upper part. Little by little it is compressed and its volume increases, pushing the liquid level downwards and allowing the air release through the nozzle.



Entrance of large volumes of air

During pipeline draining, or pipe bursts, it is necessary to bring in as much air as the quantity of outflowing liquid. This is to avoid negative pressure and serious damages to the pipeline and the entire system.

Optional




■ **Vacuum breaker version Mod. SCF 2F**, to allow the entrance and discharge of large volumes of air only. This model is normally recommended on changes in slope ascending, long ascending segments, and wherever the air release won't be required.



■ **Version for submerged applications, SUB series**, standard for DN 50/65, available both for SCF and SCF 2F Models, with elbow for air conveyance. The design sprang from the necessity of having an air valve performing also in case of flood, without the risk of contaminated water entering the pipeline. Another benefit of SUB is to avoid the spray effect, conveying spurts coming from the rapid closure of the air valve.




■ **Version for air discharge only EO series** (on request), available both for SCF and SCF 2F models. The most important application of EO is to allow the air valve installation in those locations of the system where HGL may drop below the pipe profile, and to any other node where for project requirements air entrance must be avoided.



■ **Version for air entrance only IO series**, available for vacuum breaker model. The most important application of IO is to allow the air valve installation in those locations of the system where, for project requirements, air discharge and release must be avoided.

Technical data

Air flow performance charts

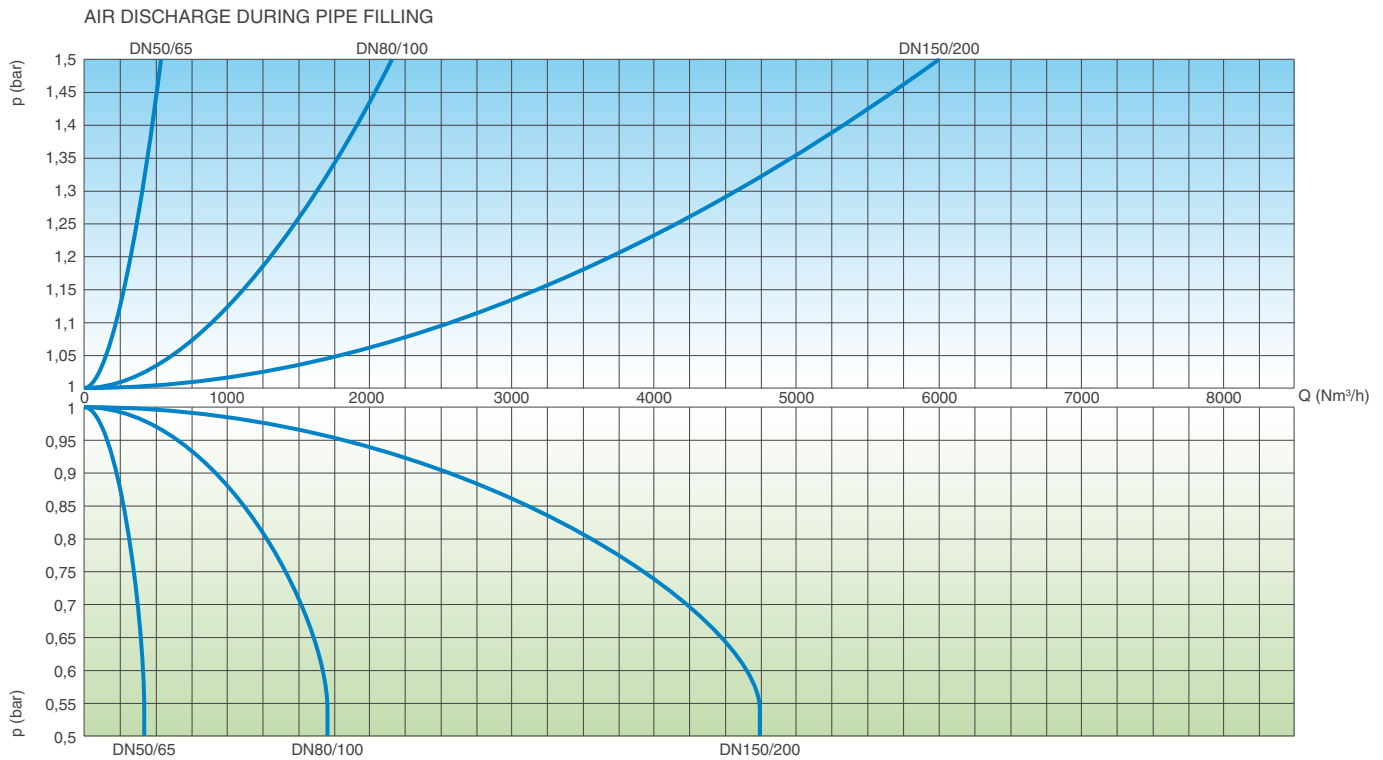

The air flow charts were created in Kg/s from laboratory tests and numerical analysis, then converted in Nm³/h using a safety factor.


Working conditions

- Water and waste water max. 60°C.
- Maximum pressure 16 bar.
- Minimum pressure 0,2 bar. Lower on request.
- Higher temperatures on request.

Standard

- Certificated and tested in compliance with EN-1074/4.
- Flanges according to EN 1092/2.
- Epoxy painting applied through fluidized bed technology blue RAL 5005.
- Changes on the flanges and painting details available on request.

AIR RELEASE DURING WORKING CONDITIONS

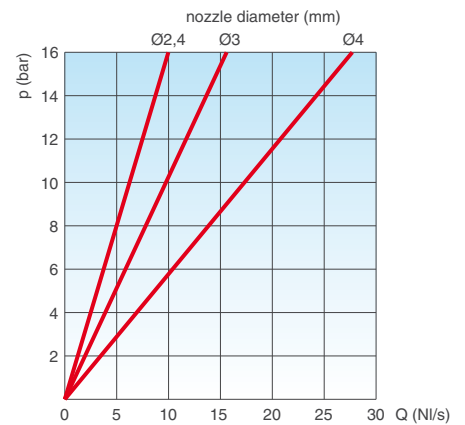

Nozzle choice


Nozzle diameter in mm according to the size of the air valve and the PN.

| | PN 10 | PN 16 |
|------------|-------|-------|
| DN 50/65 | 2,4 | 2,4 |
| DN 80/100 | 3 | 3 |
| DN 150/200 | 4 | 4 |


Weights and dimensions

| DN mm | A mm | B mm | B' mm | C mm | D mm | Weight Kg |
|--------|------|------|-------|------|------|-----------|
| 50/65 | 185 | - | 650 | 300 | 190 | 29 |
| 80/100 | 220 | 600 | - | 350 | 202 | 40 |
| 150 | 285 | 850 | - | 488 | 243 | 78 |
| 200 | 340 | 850 | - | 488 | 243 | 82 |

All values are approximate, consult CSA service for more details.

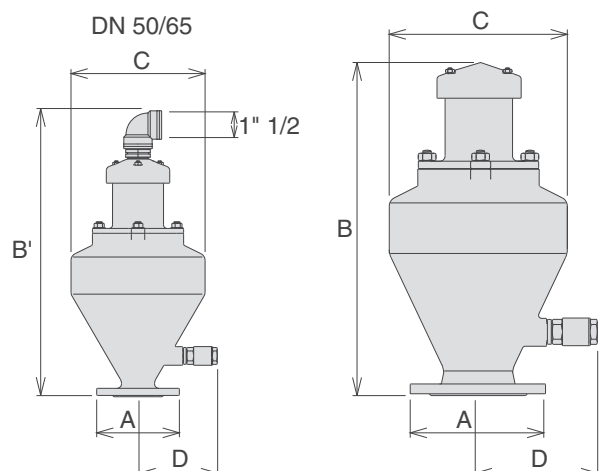

Technical details

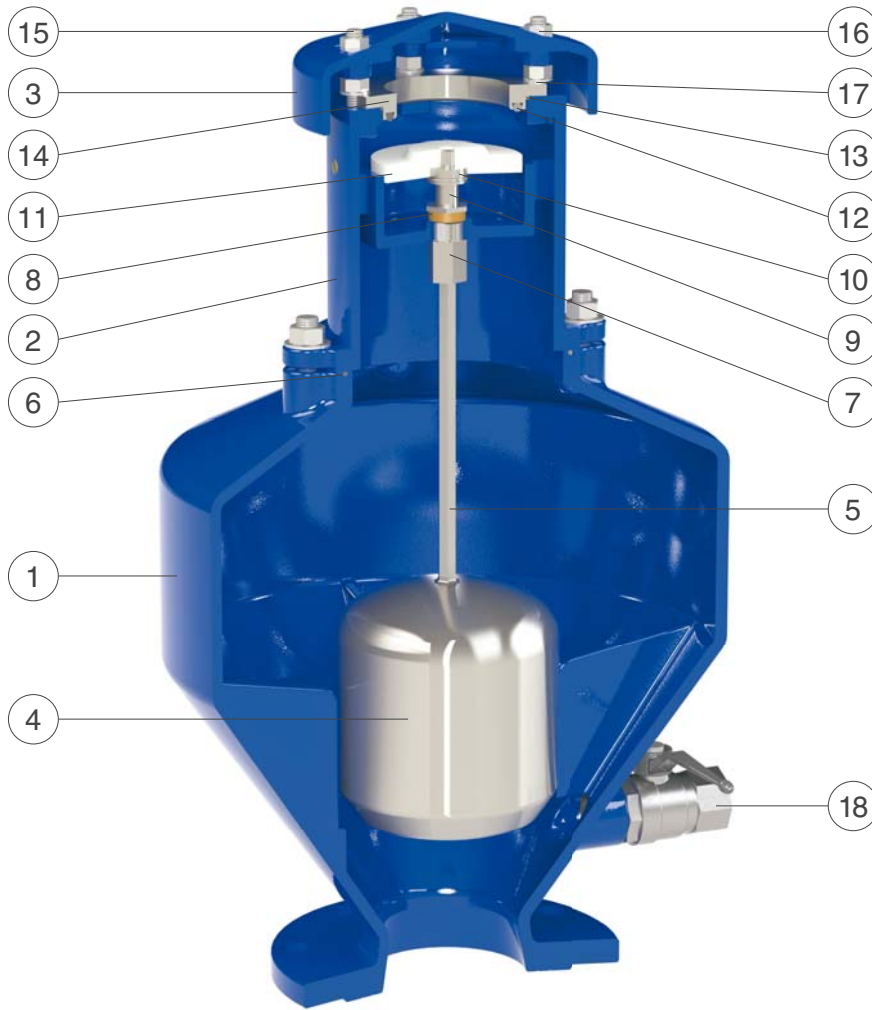

Threaded PP evacuation bend 1" 1/2 supplied as a standard for DN 50/65.

| N. | Component | Standard material | Optional |
|----|----------------|--|--------------------------|
| 1 | Lower body | ductile cast iron GJS 500-7 or GJS 450-10 | |
| 2 | Upper body | ductile cast iron GJS 500-7 or GJS 450-10 | |
| 3 | Cap | ductile cast iron GJS 500-7 or GJS 450-10 | |
| 4 | Float | stainless steel AISI 316 | |
| 5 | Float shaft | stainless steel AISI 316 | |
| 6 | O-ring | NBR | EPDM/Viton/silicone |
| 7 | Driving sleeve | stainless steel AISI 303 | stainless steel AISI 316 |
| 8 | Plane gasket | NBR | |
| 9 | Gasket holder | stainless steel AISI 316 | |
| 10 | Nozzle subset | stainless steel AISI 316 | |
| 11 | Obturator flat | polypropylene | |
| 12 | Seat gasket | NBR | EPDM/Viton/silicone |
| 13 | O-ring | NBR | EPDM/Viton/silicone |
| 14 | Seat | stainless steel AISI 304 (AISI 303 for DN 50/65) | stainless steel AISI 316 |
| 15 | Studs | stainless steel AISI 304 | stainless steel AISI 316 |
| 16 | Nuts | stainless steel AISI 304 | stainless steel AISI 316 |
| 17 | Washers | stainless steel AISI 304 | stainless steel AISI 316 |
| 18 | Ball valve 1" | stainless steel AISI 316 | |

The list of materials and components is subject to changes without notice.

ООО «ТИ-Системс» ИНЖИНИРИНГ И ПОСТАВКА ТЕХНОЛОГИЧЕСКОГО ОБОРУДОВАНИЯ

Интернет: www.tisys.ru www.tisys.kz www.tisys.by www.ti-sistemc.pф

Телефоны для связи: +7 (495) 7774788, (925)7489626, 5007154, 55, 65

Эл. почта: info@tisys.ru info@tisys.kz info@tisys.by